

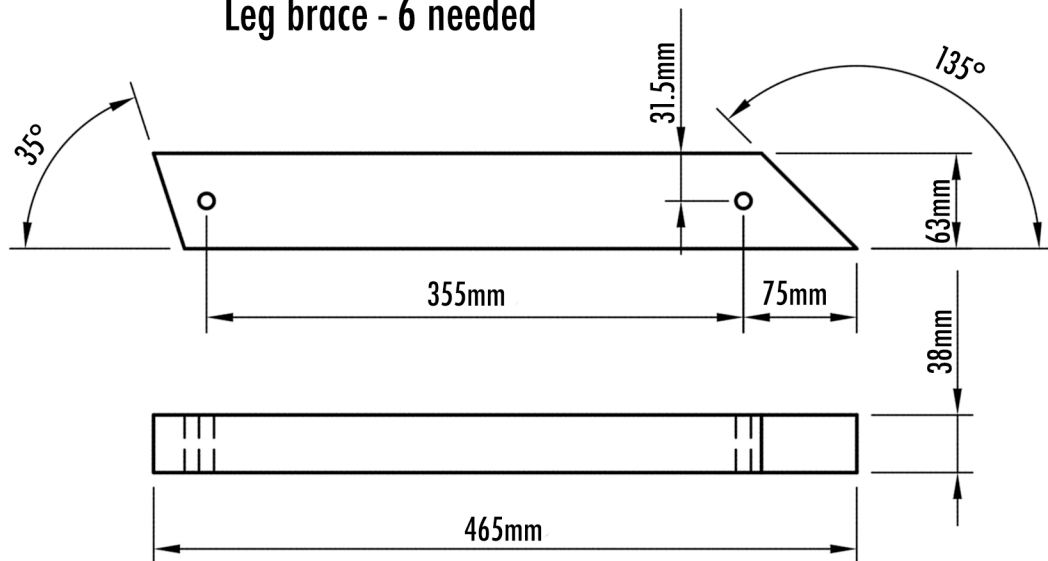


Leg brace - 6 needed

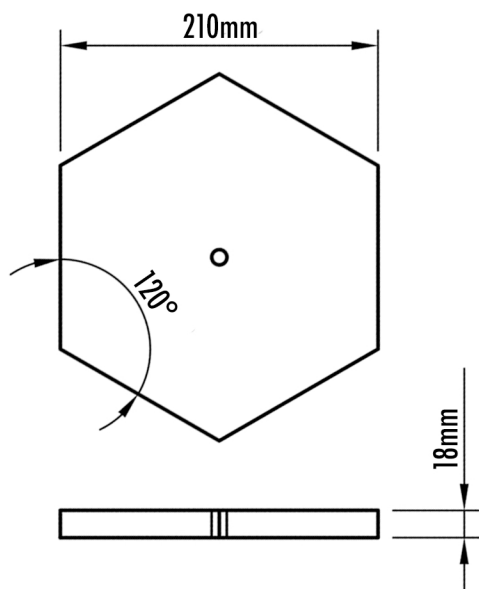

Foot - 3 needed

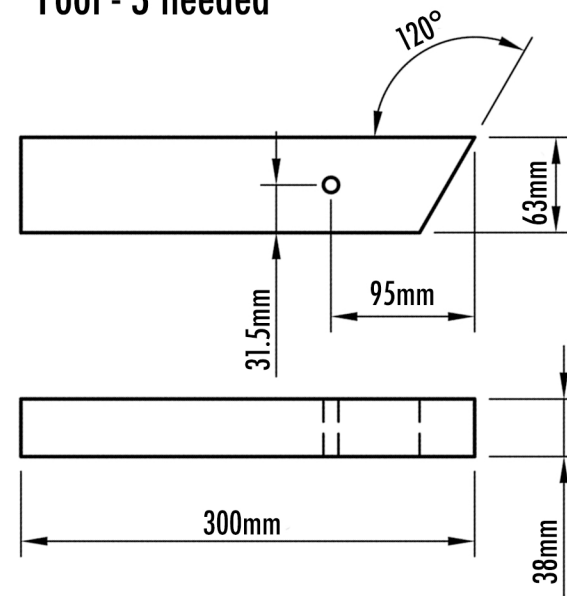

Top plates

You will need two thick plates: one for the fixed plate and a removable one, plus probably one thin one (6mm) to make a second layer for the fixing screw to pass through, depending on your mount design.

All holes shown to be drilled 10mm dia.